
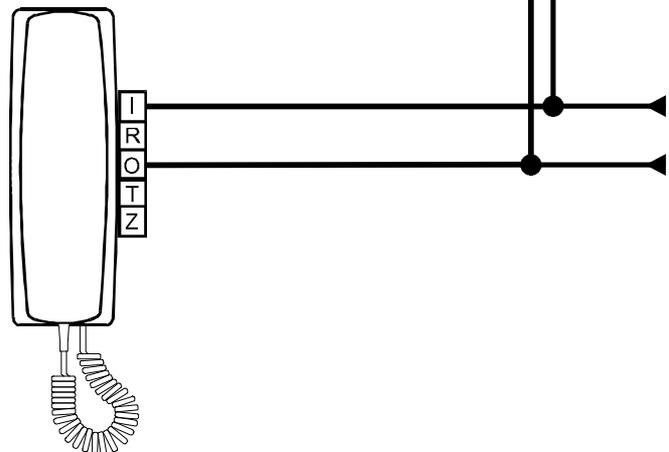


Model RT27 Extension Sounder

The RT27 is a AC / DC extension sounder designed to provide an audible tone to indicate a call on a door entry telephone. The unit can be conveniently and discreetly mounted in any area where the call tone from the telephone is not audible. Connection is made with only 2 wires to any AC or DC telephone such as the model 500X, 801 or BV (but not digital phones such as BC801 or BS).

Size (mm)	90(W) x 120(H) x 40(D)
Supply Voltage	10V AC/DC min. 18V AC/DC max.
Consumption	135mA @ 13.8V DC 245mA @ 15V AC

Compatible models
801, S, P, PS
500D, PD
500X, PX, LX, PLX
500XT, PXT, LXT, PLXT
500XC, PXC, LXC, PLXC
500H, PH
BV

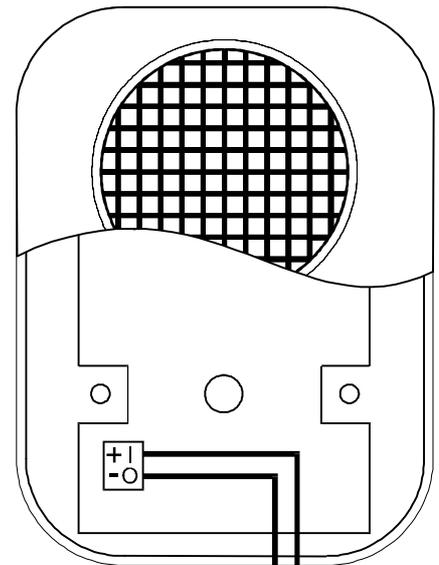

Telephone