



Typical Cable overview Proximity/Fob Entrance with battery backup PSU

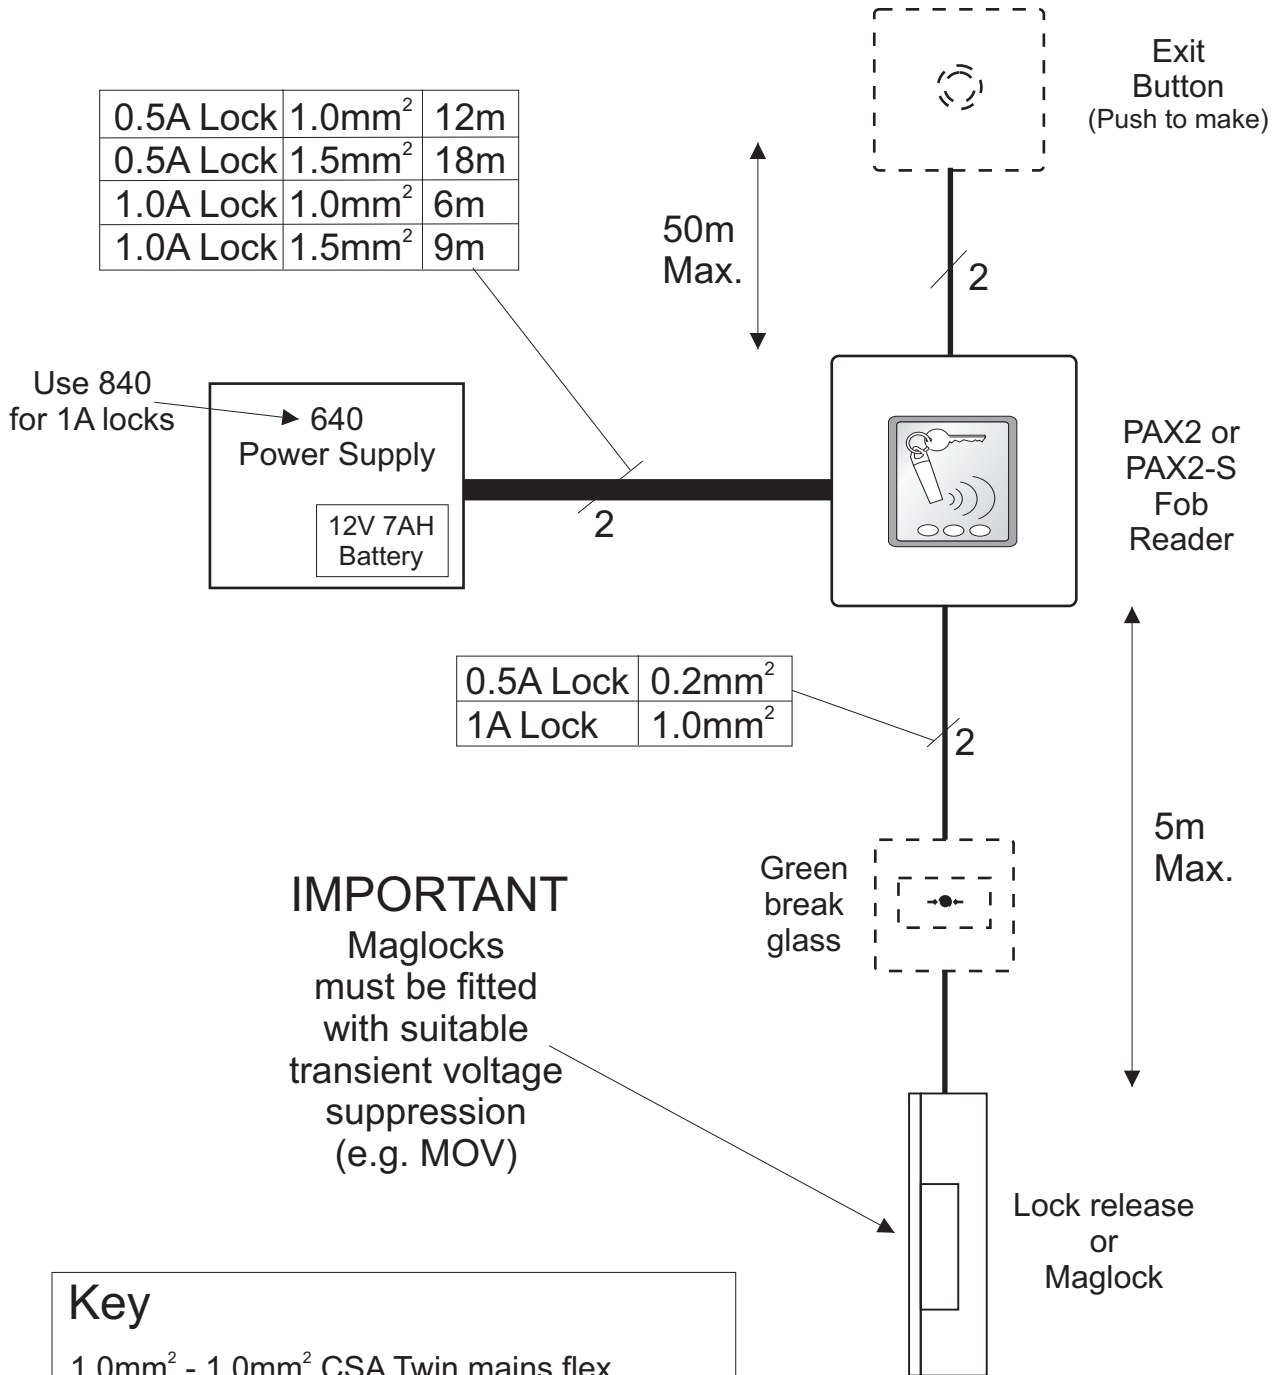

Key

1.0mm² - 1.0mm² CSA Twin mains flex
1.5mm² - 1.5mm² CSA Twin mains flex

 No. of cores
0.2mm² CSA unless otherwise stated (e.g. CW1308/CAT5)

Assume 0.5A Lock for Bell System Lock releases

DO NOT USE CHEAP CCA OR CCS CABLE