

Cable Notes

** Requires a 230V Mains connection

*** Any Maglock must be fitted with suitable back EMF suppressor, e.g. MOV

Use CAT5/5e unshielded cable, unless otherwise stated, do not use Telephone or Alarm cable.

1 x CAT5 refers to all 8 cores


The minimum number of cores are shown.

BS Video phones must be daisy-chain wired in and out as shown.

BSD1 Door controllers must be daisy-chain wired in and out as shown.

The distance between the 2 furthest parts must not exceed 300m.

The distance between any Fob/Proximity readers should not be less than 1m.

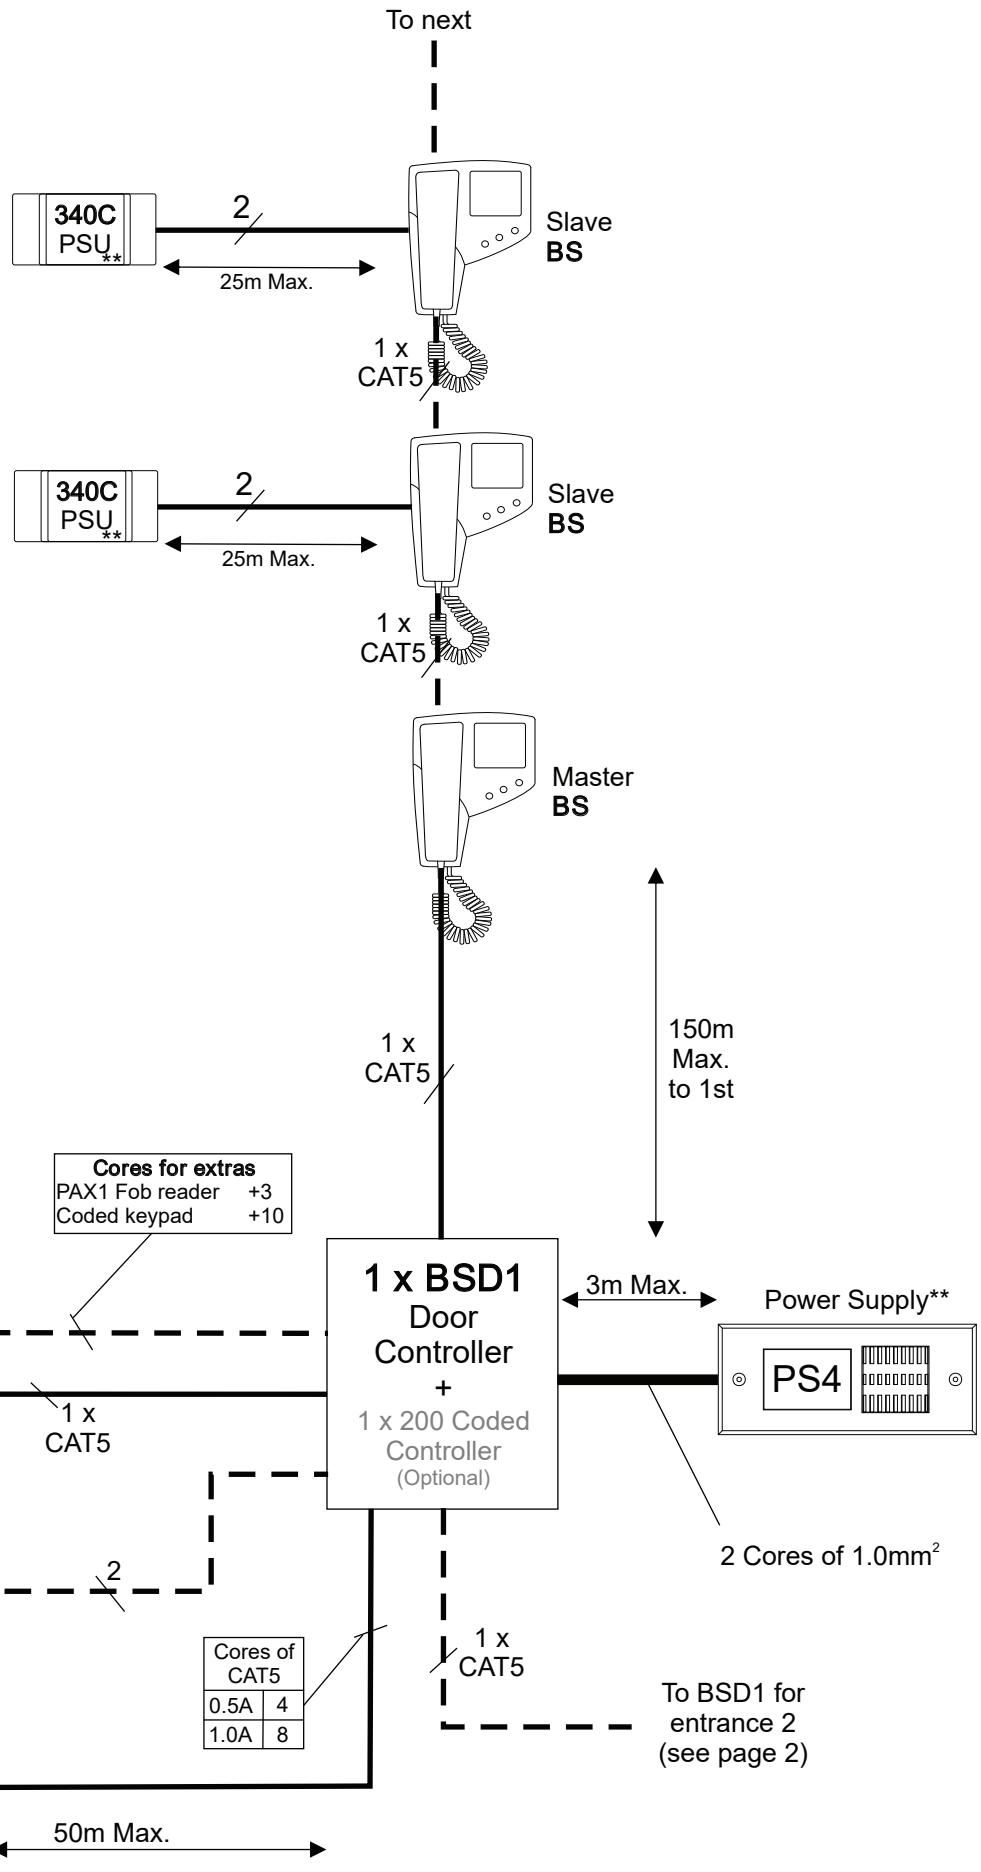

Entrance 1

