


Supplementary wiring

Single door audio entry systems with coded access using the 200 controller and BPR or PAX1 fob reader

1. Follow the CS109 wiring shown in the Bellcode manual PD-078
2. Only connect the electric lock to the 200 controller
3. No not adjust the lock type at the Fob reader (leave on Fail secure).
4. Do not follow the wiring in the Fob reader manual.
5. Follow the wiring below to connect up the Fob reader:

PAX1 Fob reader (or PAX-2(-S) on the same door)

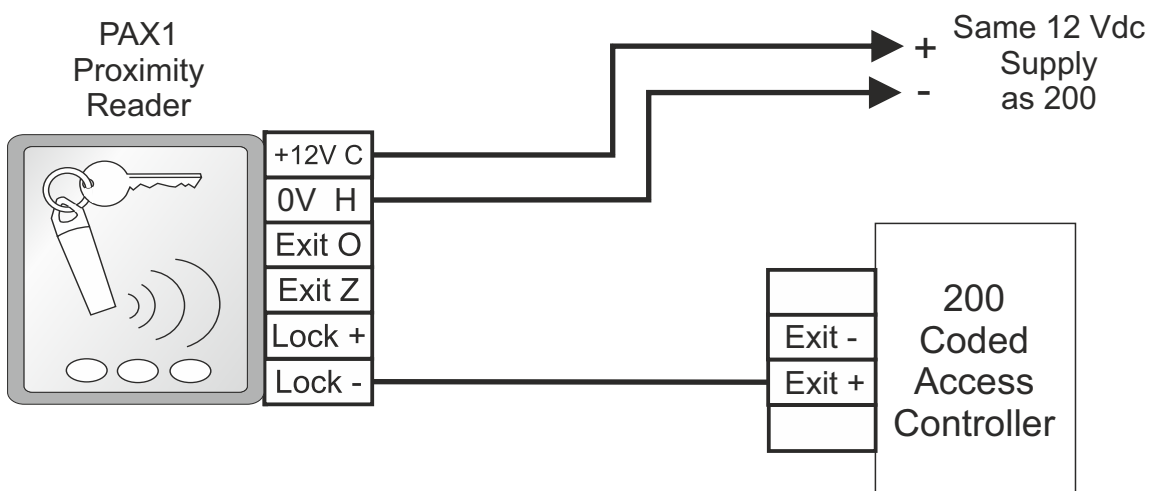

BPR Fob reader (or BPR-F(or S) on the same door)

