

XL5-BS Digital Audio Phone


(also XL5-BS/P with preprogrammed flat number)

DIP Switch Settings

(6,7,8 not used)

Ringer Mute Times(1,2,3,4)			
	No Mute		1 hour
	2 mins		2 hour
	5 mins		4 hour
	10 mins		5 hour
	15 mins		6 hour
	20 mins		8 hour
	30 mins		10 hour
	45 mins		Toggle
Master / Slave(5)			
	Slave		Master

Default is all off

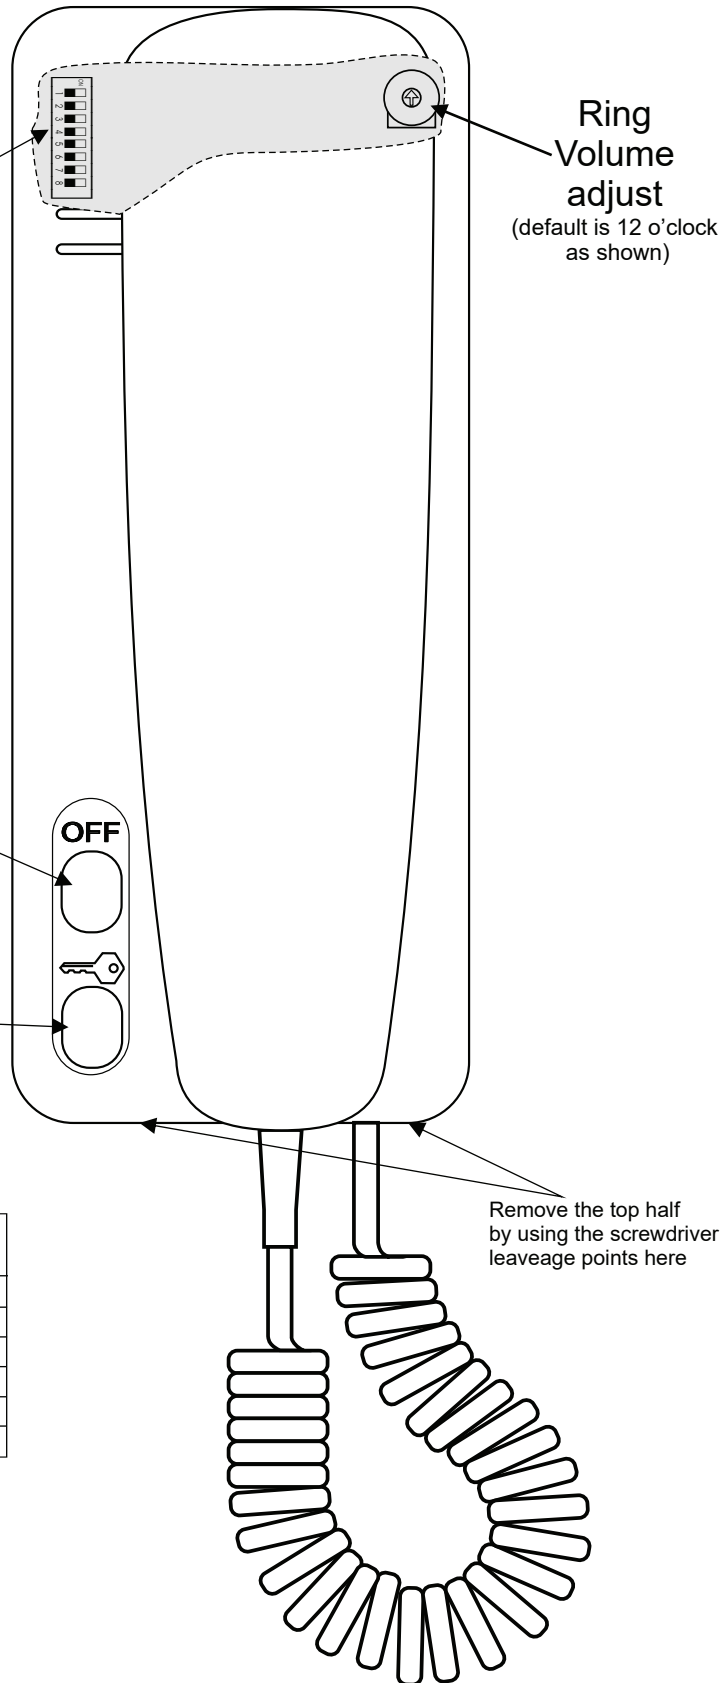

Action	Red	Green
Phone ringing	Slow flash	Slow flash
Phone idle & off hook	Flashing	
Phone muted	On	
Unlocking enabled		Flashing
Door unlocked		On 3 sec
Door left open		On

10-28V DC Operation
Compatible with Bellissimo and Bellfree video systems